

PSM-400 Hydrogen Pressure Sensor User Manual



Hangzhou SinoHySens Technology Co., Ltd.

Phone: +86-535-3466133 Website: www.h2sensor.cn

Address: Room 904, Building 17, Singapore Science Park, Qiantang New

District, Hangzhou City, Zhejiang Province, China

I、 Instruction

PSM-200 vehicle-mounted hydrogen pressure sensor is designed with high-quality sensitive sensing elements and dedicated digital circuits, and is encapsulated by a 304 stainless steel housing and a 316L stainless steel connector. This product has a good temperature compensation function and can be used stably in an environment with a wide temperature range; this product can be used for hydrogen pressure measurement in the vehicle-mounted environment of hydrogen energy vehicles, and has excellent stability and reliability.

Features


- Used for hydrogen pressure measurement on-board hydrogen energy vehicles
- Signal output: 0.5~4.5V
- 3/8-24UNF-2A thread, easy to install
- IP67 protection level

II、 Technical specifications

● Techniacl parameter

Model	PSM-400	
Measuring range	0~50MPa	0~90MPa
Working pressure	<70MPa	<150MPa
Precision	±1.5%F.S.	
Response time	2ms	
Operating temperature	-40~125℃	
Signal output	0.5~4.5VDC	
Power supply	5.0±0.25VDC	
Working current	<10mA	
Power consumption	<0.1W	
Installation	3/8-24UNF-2A	

● **Dimensions**

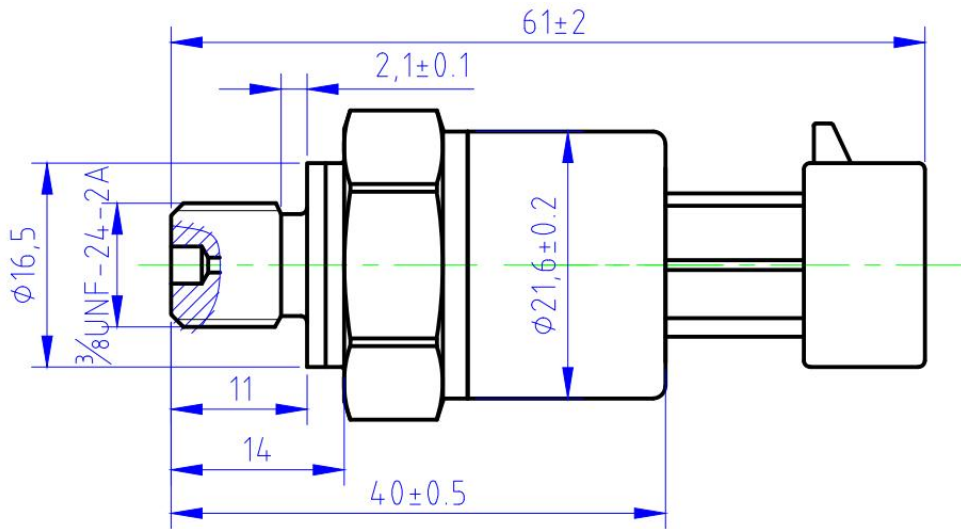


III、 Installation and use


● **Installation**

When installing the sensor, avoid excessive force or damage to the measuring parts due to the collision of sharp objects, otherwise it will affect the measurement. After completing the wiring, check carefully before turning on the power to avoid damage caused by incorrect wiring.

● **Electrical connection**

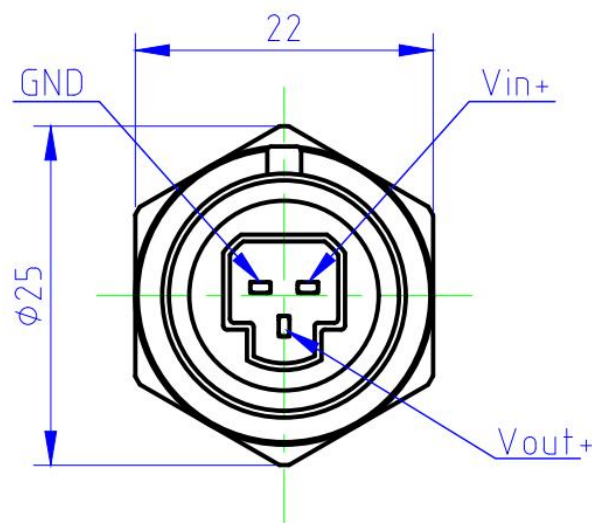

- Output curve

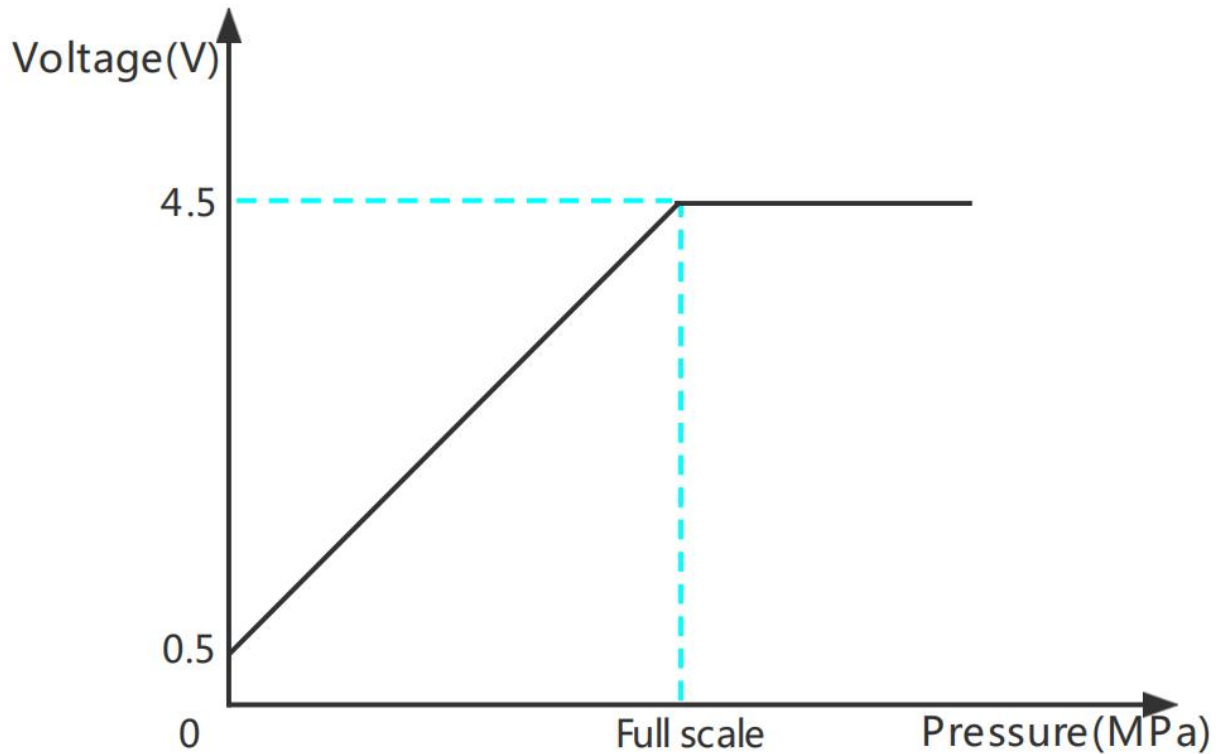

IV、Quality and service

- The company has advanced testing equipment and standardized inspection procedures. Before the products leave the factory, they will conduct strict aging tests and stability tests in accordance with the inspection procedures.
- The product has been carefully debugged and calibrated before leaving the factory to ensure measurement accuracy.
- The company provides free product after-sales service within one year from the date of sale, but doesn't include damage caused by improper use. If you need to repair or debug, please contact customer service to send it back. When sending it back, please make sure that the packaging is good to avoid damage in transit.